



LED 400W Fresnel CW/WW Spotlight (with barn doors)

MAIN FEATURES

1. 400W CW/WW
2. Field angle 15-55°
3. CCT:2700-6500K

TECHNICAL SPECIFICATIONS

LIGHT SOURCE

- Source:200W CW+200W WW

COLOR SYSTEM

- Color wheel: CW/WW

BODY

- Dimming Frequency: 2-25KHz
- LCD 1.77TFT Display
- Cooling method: fan
- Case color: black

ELECTRONICS

- Linear dimming: 0-100% Linear Dimmer

ELECTRICAL

- Input power: AC100-240V
- Power frequency: 50/60Hz
- Power: 400W

OPTICS

- Field Angle:15-55°

DYNAMIC EFFECTS

- CRI: ≥96, CQS≥96
- CCT: 2700K-6500K
- 200W CW
- 200W WW

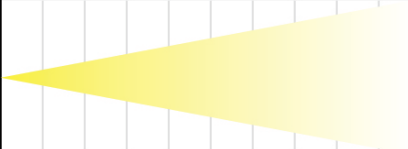
CONTROL

- DMX Channel:3/7ch
- RDM/ DMX 512, master/slave mode, auto run mode, sound control mode, manual mode
- Power supply certificate: with PFC and tel certification

PHYSICAL

- IP Rating: 20
- Cooling: Fan
- Life of LED: > 50,000 hours

PHOTOMETRICS DIAGRAM

Distance (m)		2	4	6	8	10
LUX						
Spotsize (m)	15°	0.53	1.05	1.58	2.11	2.63
	55°	2.08	3.91	6.25	8.33	10.41
2700K	15°	15607	3902	1734	975	624
	55°	4772	1193	530	298	191
3200K	15°	16108	4027	1785	1006	644
	55°	5308	1327	590	332	212
4200K	15°	18156	4539	2017	1135	726
	55°	6424	1606	714	402	257
6000K	15°	22514	5629	2502	1407	901
	55°	7474	1869	830	467	299